



VENT STACK WITH CHARCOAL FILTER

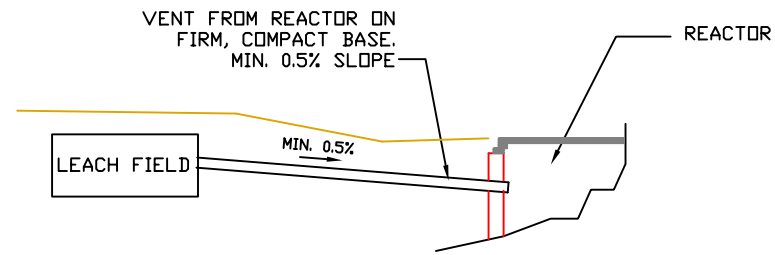


VENT TO LEACH FIELD

VENT NOTES:


1. VENT MUST BE PLACED AT A CONTINUOUS SLOPE ON A FIRM, COMPACT BASE
2. VENT MUST SLOPE A MINIMUM OF 0.5%
3. SYSTEM IS NOT ALLOWED TO VENT TO DRIP IRRIGATION OR TO A SHALLOW DISPOSAL FIELD
4. SITES WHICH DO NOT PERMIT A CONTINUOUS SLOPE AWAY FROM THE REACTOR, OR WHICH CANNOT BE VENTED TO THE DISPOSAL AREA WILL BE VENTED TO AN EXTERNAL VENT
5. EXTERNAL VENT MUST BE PROTECTED AGAINST ANIMAL ENTRY AND BE FITTED WITH A CARBON FILTER

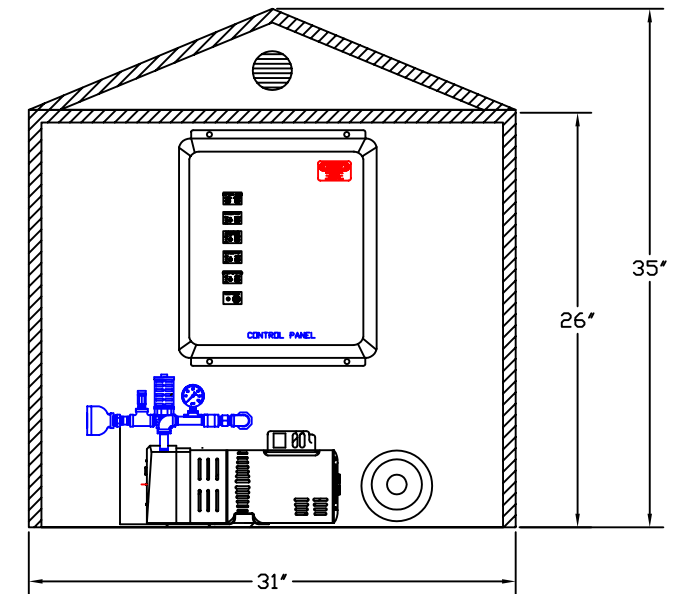

BLOWER AND CONTROL PANEL ENCLOSURE

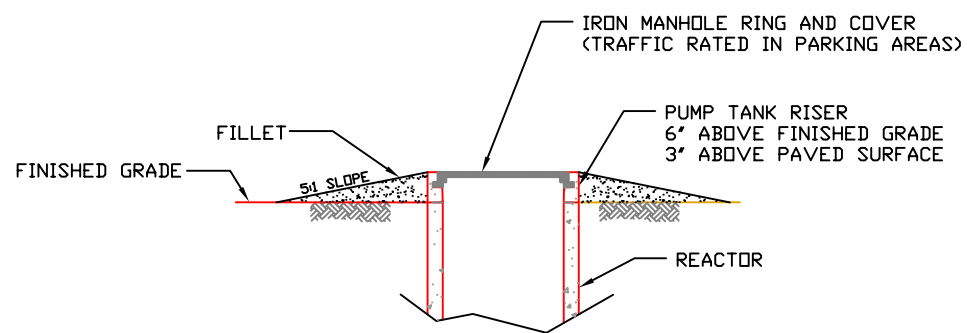

TYPICAL CLEARWELL RISER DETAIL

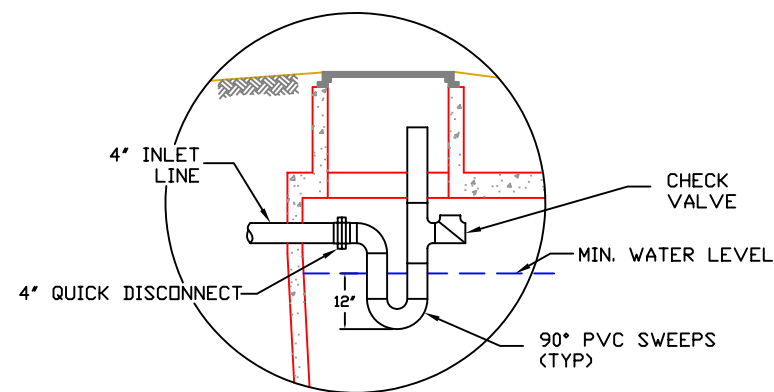

INFLUENT SAMPLE PIPING DETAIL

Dwg:	AMPHIDROME® DETAILS
Rev:	
Drawn by: ARM	App'd by:
Scale: NTS	Date: 06/19/07
<b>F MAHONY</b> & associates, inc. Water Supply & Pollution Control Equipment 273 Weymouth Street, Rockland, Massachusetts 02370	
	Pg.